

## Concurrency

- On multiprocessors, several threads can execute simultaneously, one on each processor.
- On uniprocessors, only one thread executes at a time. However, because of preemption and timesharing, threads appear to run concurrently.

---

---

Concurrency and synchronization are important even on uniprocessors.

---

---

## Thread Synchronization

- Concurrent threads can interact with each other in a variety of ways:
  - Threads share access (through the operating system) to system devices.
  - Threads in the same process share access to program variables in their process's address space.
- A common synchronization problem is to enforce *mutual exclusion*, which means making sure that only thread at a time uses a shared object, e.g., a variable or a device.
- The part of a program in which the shared object is accessed is called a *critical section*.

## Critical Section Example (Part 1)

```
int IntList::RemoveFront() {  
    ListElement *element = first;  
    ASSERT(!IsEmpty());  
    int num = first->item;  
    if (first == last) { first = last = NULL; }  
    else { first = element->next; }  
    numInList--;  
    delete element;  
    return num;  
}
```

---

---

The RemoveFront method is a critical section. It may not work properly if two threads call it at the same time on the same IntList. (Why?)

---

---

## Critical Section Example (Part 2)

```
void IntList::Append(int item) {  
    ListElement *element = new ListElement(item);  
    ASSERT(!IsInList(item));  
    if (IsEmpty()) {  
        first = element; last = element;  
    } else {  
        last->next = element; last = element;  
    }  
    numInList++;  
}
```

---

---

The Append method is part of the same critical section as RemoveFront. It may not work properly if two threads call it at the same time, or if a thread calls it while another has called RemoveFront

---

---

## Peterson's Mutual Exclusion Algorithm

```
boolean flag[2];  /* shared, initially false */
int turn;         /* shared */

flag[i] = true;   /* in one process, i = 0 and j = 1 */
turn = j;         /* in the other, i = 1 and j = 0 */
while (flag[j] && turn == j) { } /* busy wait */

    critical section    /* e.g., call to RemoveFront */

flag[i] = false;
```

---

---

Ensures mutual exclusion and avoids starvation, but works only for two processes. (Why?)

---

---

## Mutual Exclusion Using Special Instructions

- Software solutions to the critical section problem (e.g., Peterson's algorithm) assume only atomic load and atomic store.
- Simpler algorithms are possible if more complex *atomic* operations are supported by the hardware. For example:
  - Test and Set:** set the value of a variable, and return the old value
  - Swap:** swap the values of two variables
- On uniprocessors, mutual exclusion can also be achieved by disabling interrupts during the critical section. (Normally, user programs cannot do this, but the kernel can.)

## Mutual Exclusion with Test and Set

```
boolean lock;  /* shared, initially false */  
  
while (TestAndSet(&lock,true)) { }  /* busy wait */  
  
    critical section /* e.g., call to RemoveFront */  
  
lock = false;
```

---

---

Works for any number of threads, but starvation is a possibility.

---

---

## Semaphores

- A semaphore is a synchronization primitive that can be used to solve the critical section problem, and many other synchronization problems too
- A semaphore is an object that has an integer value, and that support two operations:
  - P:** if the semaphore value is non-zero, decrement the value. Otherwise, wait until the value is non-zero and then decrement it.
  - V:** increment the value of the semaphore
- Two kinds of semaphores:
  - counting semaphores:** can take on any non-negative value
  - binary semaphores:** take on only the values 0 and 1. (V on a binary semaphore with value 1 has no effect.)

---

---

By definition, the P and V operations of a semaphore are *atomic*.

---

---



## Mutual Exclusion Using a Binary Semaphore

```
binarySemaphore s;  /* initial value is 1 */
```

```
P(s);
```

```
    critical section /* e.g., call to RemoveFront */
```

```
V(s);
```

## Producer/Consumer Using a Counting Semaphore

```
countingSemaphore s; /* initial value is 0 */  
item buffer[infinite]; /* huge buffer, initially empty */
```

Producer's Pseudo-code:

```
add item to buffer  
V(s);
```

Consumer's Pseudo-code:

```
P(s);  
remove item from buffer
```

---

---

If mutual exclusion is required for adding and removing items from the buffer, this can be provided using a second semaphore. (How?)

---

---

## Producer/Consumer with a Bounded Buffer

```
countingSemaphore full;    /* initial value is 0 */
countingSemaphore empty;  /* initial value is N */
item buffer[N];           /* buffer with capacity N */
```

Producer's Pseudo-code:

```
P(empty);
  add item to buffer
V(full);
```

Consumer's Pseudo-code:

```
P(full);
  remove item from buffer
V(empty);
```

## Implementing Semaphores

```
void P(s) {  
    start critical section  
    while (s == 0) {    /* busy wait */  
        end critical section  
        start critical section }  
    s = s - 1;  
    end critical section }
```

```
void V(s) {  
    start critical section  
    s = s + 1;  
    end critical section }
```

---

---

Any mutual exclusion technique (e.g., Dekker, Lamport, test and set) can be used to protect the critical sections. However, starvation is possible with this implementation.

---

---

## Nachos Semaphore Class

```
class Semaphore {
    public:
        Semaphore(char* debugName, int initialValue);
        ~Semaphore();
        char* getName() { return name;}
        void P();
        void V();
        void SelfTest();
    private:
        char* name;    // useful for debugging
        int value;     // semaphore value, always >= 0
        List<Thread *> *queue;
};
```

## Nachos Semaphore P()

```
void Semaphore::P() {  
    Interrupt *interrupt = kernel->interrupt;  
    Thread *currentThread = kernel->currentThread;  
    IntStatus oldLevel = interrupt->SetLevel(IntOff);  
    if(value <= 0) {  
        queue->Append(currentThread);  
        currentThread->Sleep(FALSE);  
    } else { value--; }  
    (void) interrupt->SetLevel(oldLevel);  
}
```

## Nachos Semaphore V()

```
void Semaphore::V() {  
    Interrupt *interrupt = kernel->interrupt;  
    IntStatus oldLevel = interrupt->SetLevel(IntOff);  
    if (!queue->IsEmpty()) {  
        kernel->scheduler->ReadyToRun(queue->RemoveFront());  
    } else { value++; }  
    (void) interrupt->SetLevel(oldLevel);  
}
```

## Monitors

- a monitor is a programming language construct that supports synchronized access to data
- a monitor is essentially an object for which
  - object state is accessible only through the object's methods
  - only one method may be active at a time
- if two threads attempt to execute methods at the same time, one will be blocked until the other finishes
- inside of a monitor, so called *condition variables* can be declared and used



## Condition Variable

- a condition variable is an object that support two operations:
  - wait:** causes the calling thread to block, and to release the monitor
  - signal:** if threads are blocked on the signaled condition variable then unblock one of them, otherwise do nothing
- a thread that has been unblocked by *signal* is outside of the monitor and it must wait to re-enter the monitor before proceeding.
- in particular, it must wait for the thread that signalled it

---

---

This describes Mesa-type monitors. There are other types on monitors, notably Hoare monitors, with different semantics for `wait` and `signal`.

---

---

## Bounded Buffer Using a Monitor

```
item buffer[N]; /* buffer with capacity N */  
int count; /* initially 0 */  
condition notfull, notempty;
```

```
Produce(item) {  
    while (count == N) { wait(notfull); }  
    add item to buffer  
    count = count + 1;  
    signal(notempty);  
}
```

---

---

Produce is implicitly executed atomically, because it is a monitor method.

---

---

## Bounded Buffer Using a Monitor (cont'd)

```
Consume(item) {  
    while (count == 0) { wait(notempty); }  
    remove item from buffer  
    count = count - 1;  
    signal(notfull);  
}
```

---

---

Consume is implicitly executed atomically, because it is a monitor method. Notice that `while`, rather than `if`, is used in both `Produce` and `Consume`. This is important. (Why?)

---

---

## Simulating Monitors with Semaphores and Condition Variables

- Use a single binary semaphore (or Nachos “Lock”) to provide mutual exclusion.
- Each method must start by acquiring the mutex semaphore, and must release it on all return paths.
- Signal only while holding the mutex semaphore.
- Re-check the wait condition after each wait.
- Return only (the values of) variables that are local to the method.

## Producer Implemented with Locks and Condition Variables (Example)

```
item buffer[N]; /* buffer with capacity N */
int count; /* initially 0 */
Condition notfull, notempty;
Lock mutex; /* for mutual exclusion */
Produce(item) {
    mutex.Acquire();
    while (count == N) {
        notfull.Wait(mutex);
    }
    add item to buffer
    count = count + 1;
    notempty.Signal(mutex);
    mutex.Release();
}
```

## Deadlocks

- A simple example. Suppose a machine has 64MB of memory. The following sequence of events occurs.
  1. Process *A* starts, using 30MB of memory.
  2. Process *B* starts, also using 30MB of memory.
  3. Process *A* requests an additional 8MB of memory. The kernel blocks process *A*'s thread, since there is only 4 MB of available memory.
  4. Process *B* requests an additional 5MB of memory. The kernel blocks process *B*'s thread, since there is not enough memory available.

---


---

These two processes are *deadlocked* - neither process can make progress. Waiting will not resolve the deadlock. The processes are permanently stuck.

---

---

## Resource Allocation Graph (Example)

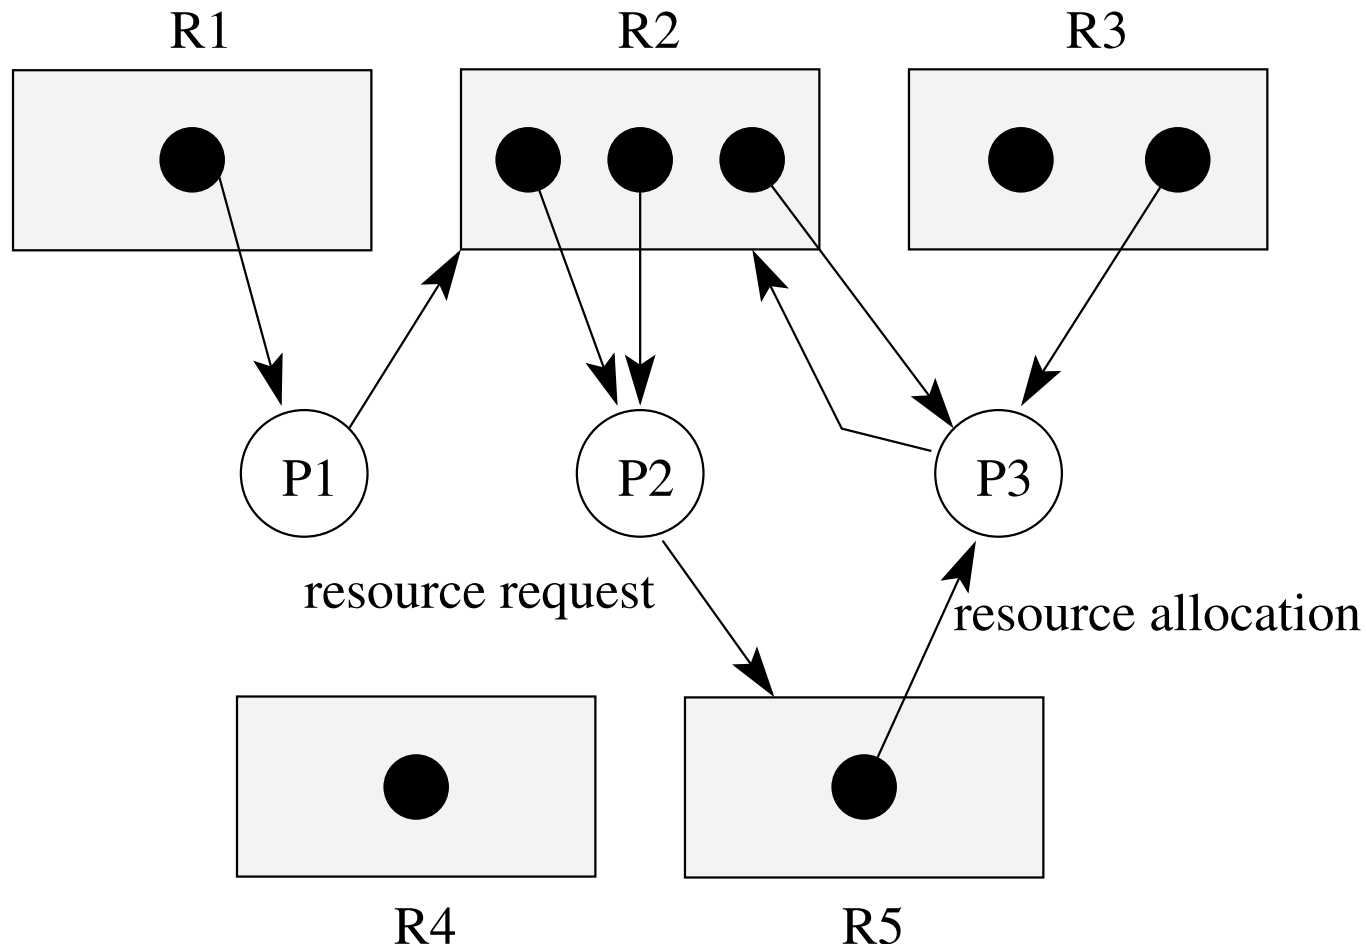

---


---

Is there a deadlock in this system?

---

---

## Resource Allocation Graph (Another Example)

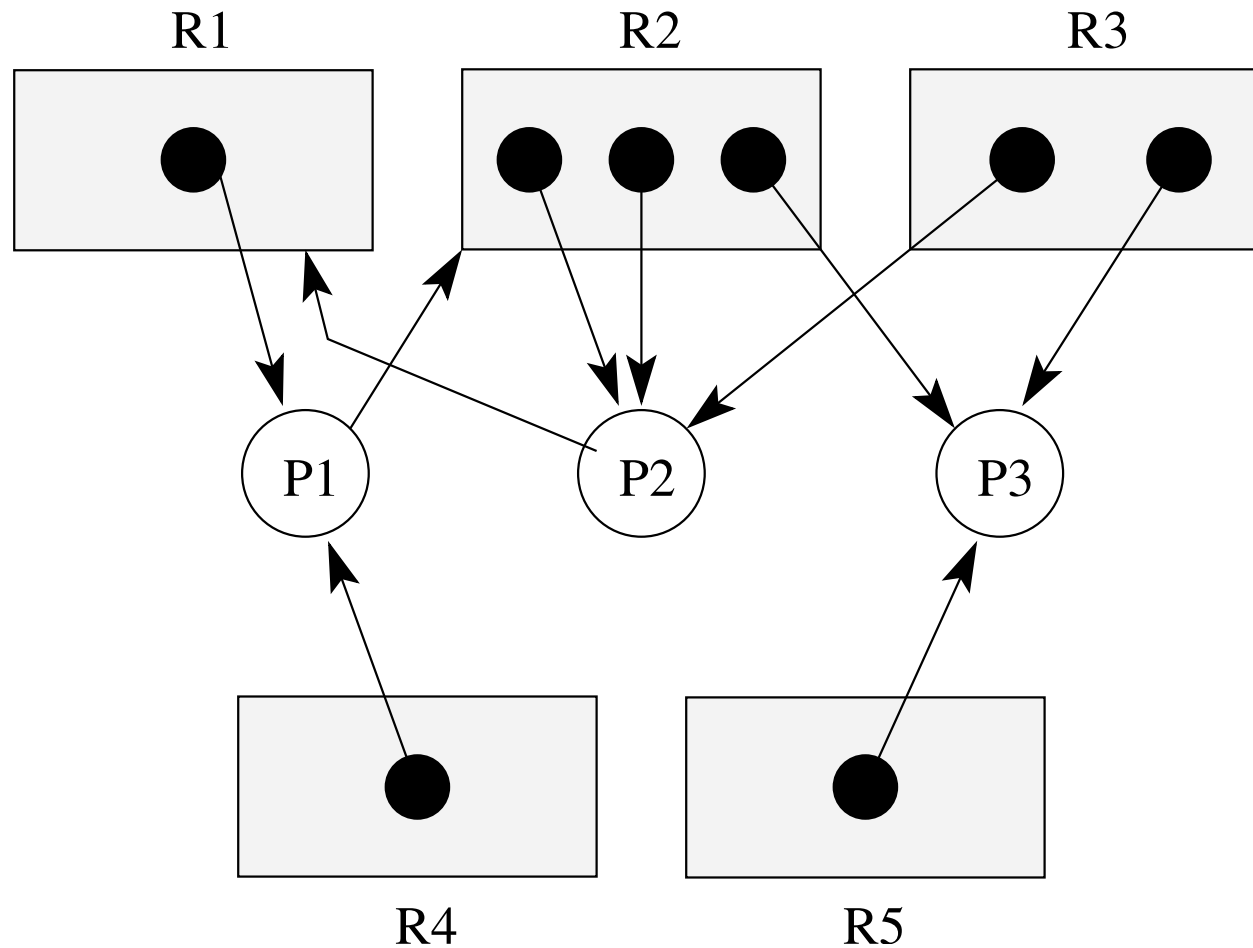

---

---

Is there a deadlock in this system?

---

---



## Deadlock Prevention

**No Hold and Wait:** prevent a process from requesting resources if it currently has resources allocated to it. A process may hold several resources, but to do so it must make a single request for all of them.

**Preemption:** to wait for a resource, a process must release and (after waiting) re-acquire any resources it currently holds.

**Resource Ordering:** Order (e.g., number) the resource types, and require that each process acquire resources in increasing resource type order. That is, a process may make no requests for resources of type less than or equal to  $i$  once the process has requested resources of type  $i$ .

## Deadlock Detection and Correction

- main idea: the system maintains the resource allocation graph and tests it to determine whether there is a deadlock. If there is, the system must recover from the deadlock situation.
- deadlock recovery is usually accomplished by terminating one or more of the processes involved in the deadlock
- when to test for deadlocks? Can test on every blocked resource request, or can simply test periodically. Deadlocks persist, so periodic detection will not “miss” them.

---

---

Deadlock detection and deadlock correction are both costly. This approach makes sense only if deadlocks are expected to be infrequent.

---

---

## Detecting Deadlock in a Resource Allocation Graph

- System State Notation:
  - $R_i$ : request vector for process  $P_i$
  - $A_i$ : current allocation vector for process  $P_i$
  - $U$ : unallocated (available) resource vector
- Additional Algorithm Notation:
  - $T$ : scratch resource vector
  - $f_i$ : algorithm is finished with process  $P_i$ ? (boolean)

## Detecting Deadlock (cont'd)

```
/* initialization */  
 $T = U$   
 $f_i$  is false if  $A_i > 0$ , else true  
/* can each process finish? */  
while  $\exists i ( \neg f_i \wedge R_i \leq T )$  {  
     $T = T + A_i$ ;  
     $f_i = \text{true}$   
}  
/* if not, there is a deadlock */  
if  $\exists i ( \neg f_i )$  then report deadlock  
else report no deadlock
```

## Deadlock Detection, Positive Example

- $R_1 = (0, 1, 0, 0, 0)$
- $R_2 = (0, 0, 0, 0, 1)$
- $R_3 = (0, 1, 0, 0, 0)$
- $A_1 = (1, 0, 0, 0, 0)$
- $A_2 = (0, 2, 0, 0, 0)$
- $A_3 = (0, 1, 1, 0, 1)$
- $U = (0, 0, 1, 1, 0)$

---

---

The deadlock detection algorithm will terminate with  $f_1 == f_2 == f_3 == \text{false}$ , so this system is deadlocked.

---

---

## Deadlock Detection, Negative Example

- $R_1 = (0, 1, 0, 0, 0)$
- $R_2 = (1, 0, 0, 0, 0)$
- $R_3 = (0, 0, 0, 0, 0)$
- $A_1 = (1, 0, 0, 1, 0)$
- $A_2 = (0, 2, 1, 0, 0)$
- $A_3 = (0, 1, 1, 0, 1)$
- $U = (0, 0, 0, 0, 0)$

---

---

This system is not in deadlock. It is possible that the processes will run to completion in the order  $P_3, P_1, P_2$ .

---

---