

Bare-Hand Continuous VR Locomotion Using Beyond-FOV, Around-HMD Unimanual Gesture

Shaikh Shawon
Arefin Shimon

ssarefin@uwaterloo.ca
University of Waterloo
Waterloo, ON, Canada

Junwei
Sun

jwsun@idt.eitech.edu.cn
Ningbo Institute of Digital
Twin, Ningbo, China

Qiang
Xu

qiang.xu1@huawei.com
Huawei Technologies
Markham, ON, Canada

Jian
Zhao

jianzhao@uwaterloo.ca
University of Waterloo
Waterloo, ON, Canada

Abstract

We present *Beyond-FOV* locomotion, a continuous VR navigation technique using above-neck unimanual gestures outside visual frustum of HMD-mounted cameras, supporting simultaneous navigation and object interaction without lower-limb movement, preserving natural head- and gaze-based exploration across diverse postures, and improving accessibility for bare-hand users with lower-limb disabilities. Evaluated as an imaginary interface using external motion tracking in a within-subjects study ($N=16$), *Beyond-FOV* matched or exceeded the performance of within-FOV bare-hand locomotion techniques, establishing it as a promising, accessible, and space-efficient method for bare-hand VR locomotion.

CCS Concepts

• **Computing methodologies** → *Motion capture*; • **Human-centered computing** → *Mobile devices*; **Empirical studies in ubiquitous and mobile computing**; **Gesture input**; • **Hardware** → *Emerging interfaces*.

Keywords

Virtual Reality, Continuous Locomotion, Motion Tracking, Unimanual Interaction, Beyond-field-of-view Interaction

1 Introduction

Modern consumer VR systems enable natural, controller-free interaction via hand tracking within the field of view (FOV) of cameras on head-mounted displays (HMDs) [2]. However, effective bare-hand continuous locomotion remains challenging — especially in space-constrained or accessibility-limited settings — despite its importance for immersive VR. Continuous locomotion better supports immersion, presence, and spatial awareness than teleportation [17], but most existing techniques rely on lower-limb input—such as room-scale walking [18], walking-in-place [23], or specialized seated hardware [5, 10] — which limits accessibility and practicality in seated or reclined settings [9, 21]. Upper-body alternatives, including arm-swinging, head movement, and gaze-directed navigation [4, 22, 24], often cause fatigue and interfere with interaction or visual exploration [8, 14]. Within-FOV bare-hand techniques preserve natural head and gaze movement, but

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

Poster at *Graphics Interface 2026 (GI '26)*, Waterloo, ON, Canada
© 2026 Copyright held by the owner/author(s).

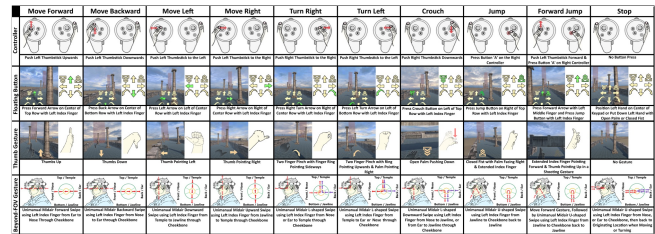


Figure 1: User interface for all locomotion approaches.

suffer from gestural interference and visual occlusion during object interaction [11, 19]. Previous below-neck and behind-body approaches [3, 6, 7, 12, 13, 15, 20] can also cause gestural interference and visual occlusion during head movement — or are ergonomically unsuitable for sustained use.

To address these limitations, we introduce *Beyond-FOV locomotion*, a bare-hand VR locomotion technique using above-neck, around-HMD unimanual gestures outside the visual frustum to separate locomotion from object interaction during natural head movement. By avoiding HMD contact, it prevents headset disturbance and visual jitter while supporting continuous movement, turning, crouching, and jumping without lower-limb input or body reorientation, and additionally enabling seamless transitions between unimanual locomotion and bimanual object interaction. We evaluated *Beyond-FOV* using external optical tracking, independent of current sensing limitations, in a within-subjects study ($N = 16$) against a controller baseline and two within-FOV bare-hand locomotion techniques, and found the performance comparable to or better than within-FOV approaches in most cases. This positions *Beyond-FOV* input around HMD as a promising direction for accessible and space-efficient VR locomotion, motivating further on-device sensing approaches for practical deployment.

2 Interaction and Environment Design

Figure 1 summarizes the gesture and key mappings for all four locomotion techniques. All techniques were performed seated on a stationary non-swiveling chair (Figure 2b). Gesture mappings were developed through a 2-hour co-design session with six participants, building on prior within-FOV locomotion techniques [1, 11, 19]. All locomotion input used the non-dominant hand, preserving the dominant hand for object interaction during navigation [16]. Figure 2a illustrates the VR environment, divided into three task zones of increasing complexity. Task 1 required navigating a $110m \times 10m$ corridor while touching pillars. Task 2 added turning, jumping, and crouching in a $143m \times 10m$ corridor. Task 3 combined complex locomotion with simultaneous object interaction in a $138m \times 10m$ corridor, where participants used a sword to strike pillars while

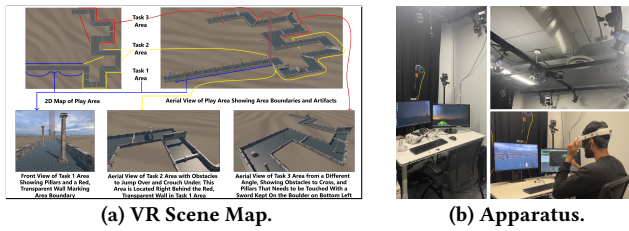


Figure 2: VR task zones and vicon+VR setup in apparatus.

moving. A $25m \times 25m$ transitional area separated Tasks 2 and 3, where participants acquired the sword using direct or distance grabbing.

For *Beyond-FOV*, we designed around-HMD midair gestures centered near the cheekbone region, exploring axial, L-shaped, and U-shaped swipe variants. Based on co-design feedback, locomotion used trigger-based input, where discrete gestures initiated continuous movement or turning until interrupted or replaced by another command. Because the non-dominant hand remained outside the visual workspace, interaction relied on proprioception relative to the HMD. To support learnability and error recovery, a transparent finger-tracking radar highlighted the non-dominant index finger within interaction zones, while successful gestures triggered visual confirmation cues in the lower-right corner of the VR scene.

3 Experimental Setup

The system (Figure 2b) featured a 16-core AMD Ryzen 9 workstation (32 GB RAM) running *Vicon Tracker 3.9*, a Unity-based VR application, and a custom Python tracking pipeline for real-time *Beyond-FOV* locomotion control. A *Meta Quest 2* headset with Vicon markers connected wirelessly to the workstation.

We conducted an IRB-approved within-subjects study with 7 female & 9 male participants (age: $\mu = 28.9$, $SD = 9.48$, range 18–64). 3 participants had limited lower-limb mobility & used assistive supports. Each participant completed 4 independent locomotion sessions across 4 counterbalanced techniques, spread over 2 days (135 min. total), and received 45 CAD. Pre-study questionnaires collected demographic and VR experience data. Before each technique, participants watched a 1 minute instructional video. Task completion times were recorded as objective performance measures. After each technique, participants completed questionnaires measuring self-reported *Ratings*, *System Usability Scale* (SUS), *NASA-TLX* workload, selected *Simulator Sickness Questionnaire* (SSQ), and *Device Assessment Questionnaire* (DAQ) items for upper-limb fatigue. SUS was converted to *Learnability* and *Usability* sub-scales according to standard practice. Post-study semi-structured interviews and observational notes revealed insights into different approaches.

4 Results

Controller achieved the fastest completion times across tasks, while *Beyond-FOV* emerged as the fastest bare-hand technique with the highest bare-hand subjective ratings, maintaining competitive performance to *Thumb Gesture* and consistently outperforming *Floating Button* across increasing task complexity (Figure 3). Participants reported that *Beyond-FOV* required greater initial learning effort and independent discoverability. However, once learned, its usability became comparable to other bare-hand techniques, suggesting

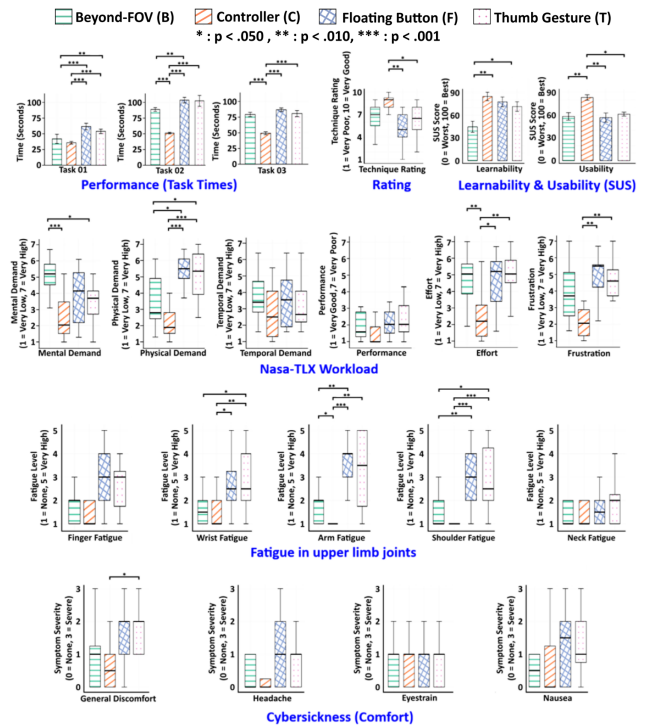


Figure 3: Metrics comparison among locomotion techniques.

that the primary limitation lies in onboarding rather than steady-state interaction. Improved guidance and early-stage feedback may help reduce this learnability gap.

Compared to within-FOV techniques, *Beyond-FOV* significantly reduced physical demand and upper-limb fatigue while introducing slightly higher mental demand. This cognitive-physical trade-off did not negatively affect perceived performance, overall effort, or temporal demand. Frustration levels were closer to the *Controller* baseline than to other bare-hand techniques, indicating a more balanced interaction experience. Trends in *NASA-TLX*, partial *SSQ*, and *DAQ* measures (Figures 3) further suggest that *Beyond-FOV* reduce & upper-limb joint fatigue & cybersickness relative to within-FOV bare-hand locomotion.

In post-study feedback, participants consistently preferred bare-hand interaction for manipulating virtual objects due to its naturalness and directness. *Beyond-FOV* was additionally perceived as particularly suitable for relaxed, seated, reclined, or mobility-constrained use cases where maintaining the hands within the visual workspace is difficult.

5 Conclusion

Initial results on around-HMD unimanual gesture-based continuous locomotion input outside the visual frustum show its viability as an alternative to within-FOV bare-hand locomotion. This approach enables VR in limited spaces and supports both standing and non-standing postures, potentially increasing accessibility for those with lower-limb mobility constraints. While further refinement is needed, this work aims to motivate broader exploration of beyond-FOV manual interaction for VR locomotion control.

References

- [1] Matteo Basile, Marco Raoul Marini, and Luigi Cinque. 2025. Like To Move: A Novel Dual-Mode One-Handed Locomotion Technique for Virtual Reality. In *Proceedings of the 2025 11th International Conference on Virtual Reality (ICVR)* (Wageningen, The Netherlands) (ICVR '25). IEEE, Piscataway, NJ, USA, 66–72. doi:10.1109/ICVR66534.2025.11172442
- [2] Daniele Borzelli, Vittorio Boarini, and Antonino Casile. 2025. A Quantitative Assessment of the Hand Kinematic Features Estimated by the Oculus Quest 2. *Sci. Rep.* 15, 8842 (2025), 1–14. doi:10.1038/s41598-025-91552-5
- [3] Eugenie Brasier, Olivier Charpou, Nicolas Ferey, Jeanne Vezien, and Caroline Appert. 2020. AR Pads: Mid-air Indirect Input for Augmented Reality. In *Proceedings of the 2020 IEEE International Symposium on Mixed and Augmented Reality* (Porto de Galinhas, Brazil) (ISMAR '20). IEEE, Piscataway, NJ, USA, 332–343. doi:10.1109/ISMAR50242.2020.00060
- [4] Jorge C. S. Cardoso. 2016. Comparison of gesture, gamepad, and gaze-based locomotion for VR worlds. In *Proceedings of the 2016 22nd ACM Symposium on Virtual Reality Software and Technology* (Munich, Germany) (VRST '16). ACM, New York, NY, USA, 319–320. doi:10.1145/2993369.2996327
- [5] Christopher Carmichael, Marco Valdez Balderas, Bill Ko, Atiya Nova, Angela Tabafunda, and Alvaro Uribe-Quevedo. 2020. Spring Stepper: A Seated VR Locomotion Controller. In *Proceedings of the 2020 22nd Symposium on Virtual and Augmented Reality* (Virtual, Brazil) (SVR '20). IEEE, Piscataway, NJ, USA, 346–350. doi:10.1109/SVR51698.2020.00058
- [6] Wen-Wei Cheng and Liwei Chan. 2024. BodyTouch: Investigating Eye-Free, On-Body and Near-Body Touch Interactions with HMDs. *Proc. ACM Interact. Mob. Wearable Ubiquitous Technol.* 7, 4, Article 152 (dec 2024), 22 pages. doi:10.1145/3631426
- [7] Jay Henderson, Jessy Ceha, and Edward Lank. 2020. STAT: Subtle Typing Around the Thigh for Head-Mounted Displays. In *Proceedings of the 22nd International Conference on Human-Computer Interaction with Mobile Devices and Services* (Oldenburg, Germany) (MobileHCI '20). ACM, New York, NY, USA, Article 27, 11 pages. doi:10.1145/3379503.3403549
- [8] Kenneth Holmqvist, Marcus Nyström, Richard Andersson, Richard Dewhurst, Halszka Jarodzka, and Joost [Van de Weijer]. 2011. *Eye tracking: A comprehensive guide to methods and measures*. Oxford University Press, NY, United States.
- [9] Marlene Huber, Simon Kloiber, Annalena Ulschmid, Agata Marta Soccini, Alessandro Clocciatti, Hannes Kaufmann, and Katharina Krösl. 2025. Exploring Seated Locomotion Techniques in Virtual Reality for People with Limited Mobility. In *Proceedings of the 2025 20th International Conference on Computer Graphics Theory and Applications (GRAPP)* (Porto, Portugal) (GRAPP '25). SciTePress, Setúbal, Portugal, 161–173. doi:10.5220/0013305000003912
- [10] Alexandra Kitson, Bernhard E. Riecke, Abraham M. Hashemian, and Carman Neustaedter. 2015. NaviChair: Evaluating an Embodied Interface Using a Pointing Task to Navigate Virtual Reality. In *Proceedings of the 2015 3rd ACM Symposium on Spatial User Interaction* (Los Angeles, CA, USA) (SUI '15). ACM, New York, NY, USA, 123–126. doi:10.1145/2788940.2788956
- [11] Vichor Kronemberger, Renato Cherullo, Thiago Azevedo, Thiago Porcino, and Alberto Raposo. 2024. Hand gestures for continuous locomotion and snap turn for VR Experiences. In *Proceedings of the 2024 26th Symposium on Virtual and Augmented Reality (SVR)* (Rio Grande, Brazil) (SVR '23). ACM, New York, NY, USA, 243–247. doi:10.1145/3625008.3625029
- [12] Naoki Kunieda and Hiroyuki Manabe. 2024. OSIRITap: Whole-Body Interface that Recognizes Tap Input Using Only an HMD and Wrist-Mounted IMUs. In *Proceedings of the 2024 ACM Symposium on Spatial User Interaction* (Trier, Germany) (SUI '24). ACM, New York, NY, USA, Article 60, 2 pages. doi:10.1145/3677386.3688871
- [13] Alexander Kyu, Hongyu Mao, Junyi Zhu, Mayank Goel, and Karan Ahuja. 2024. EITPose: Wearable and Practical Electrical Impedance Tomography for Continuous Hand Pose Estimation. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems* (Honolulu, HI, USA) (CHI '24). ACM, New York, NY, USA, Article 402, 10 pages. doi:10.1145/3613904.3642663
- [14] Esteban Segarra Martinez, Annie S. Wu, and Ryan P. McMahan. 2022. Research Trends in Virtual Reality Locomotion Techniques. In *Proceedings of the 2022 IEEE Conference on Virtual Reality and 3D User Interfaces* (Christchurch, New Zealand) (IEEE VR '22). IEEE, Piscataway, NJ, USA, 270–280. doi:10.1109/VR51125.2022.00046
- [15] Tzu-Wei Mi, Jia-Jun Wang, and Liwei Chan. 2023. LapTouch: Using the Lap for Seated Touch Interaction with HMDs. *Proc. ACM Interact. Mob. Wearable Ubiquitous Technol.* 7, 3, Article 114 (sep 2023), 23 pages. doi:10.1145/3610878
- [16] Ken Pfeuffer, Jason Alexander, and Hans Gellersen. 2016. Partially-indirect Bimanual Input with Gaze, Pen, and Touch for Pan, Zoom, and Ink Interaction. In *Proceedings of the 2016 SIGCHI Conference on Human Factors in Computing Systems* (San Jose, California, USA) (CHI '16). ACM, New York, NY, USA, 2845–2856. doi:10.1145/2858036.2858201
- [17] Bernhard E. Riecke and Daniel Zielasko. 2021. Continuous vs. Discontinuous (Teleport) Locomotion in VR: How Implications can Provide both Benefits and Disadvantages. In *Proc. VRW*. IEEE, Piscataway, NJ, USA, 373–374. doi:10.1109/VRW52623.2021.00075
- [18] Roy A Ruddle and Simon Lessels. 2006. For Efficient Navigational Search, Humans Require Full Physical Movement, but Not a Rich Visual Scene. *Psychol. Sci.* 17, 6 (jun 2006), 460–465. doi:10.1111/j.1467-9280.2006.01728.x
- [19] Alexander Schäfer, Gerd Reis, and Didier Stricker. 2022. Controlling Continuous Locomotion in Virtual Reality with Bare Hands Using Hand Gestures. In *Proceedings of the 2022 19th EuroXR International Conference* (Stuttgart, Germany) (EuroXR '22). Springer, Berlin-Heidelberg, Germany, 191–205. doi:10.1007/978-3-031-16234-3_11
- [20] Paul Strelji, Rayan Armani, Yi Fei Cheng, and Christian Holz. 2023. HOOV: Hand Out-Of-View Tracking for Proprioceptive Interaction using Inertial Sensing. In *Proceedings of the 2023 SIGCHI Conference on Human Factors in Computing Systems* (Hamburg, Germany) (CHI '23). ACM, New York, NY, USA, Article 310, 16 pages. doi:10.1145/3544548.3581468
- [21] Reem Tawfik and Daniel Harley. 2025. From the comfort of home: examining consumer virtual reality use in the home. *Digit. Creativity* 36, 4 (2025), 277–296. doi:10.1080/14626268.2025.2543452
- [22] Léo Terziman, Maud Marchal, Mathieu Emily, Franck Multon, Bruno Arnaldi, and Anatole Lécuyer. 2010. Shake-your-head: revisiting walking-in-place for desktop virtual reality. In *Proceedings of the 2010 17th ACM Symposium on Virtual Reality Software and Technology* (Hong Kong) (VRST '10). ACM, New York, NY, USA, 27–34. doi:10.1145/1889863.1889867
- [23] Betsy Williams, Stephen Bailey, Gayathri Narasimham, Muqun Li, and Bobby Bodenheimer. 2011. Evaluation of Walking in Place on a Wii Balance Board to Explore a Virtual Environment. *ACM Trans. Appl. Percept.* 8, 3, Article 19 (aug 2011), 14 pages. doi:10.1145/2010325.2010329
- [24] Preston Tunnell Wilson, William Kalescky, Ansel MacLaughlin, and Betsy Williams. 2016. VR locomotion: Walking Walking in place Arm Swinging. In *Proceedings of the 2016 15th ACM SIGGRAPH Conference on Virtual-Reality Continuum and Its Applications in Industry - Volume 1* (Zhuhai, China) (VRCAI '16). ACM, New York, NY, USA, 243–249. doi:10.1145/3013971.3014010