

Constraint Satisfaction

[RN2] Sec 5.1-5.2

[RN3] Sec 6.1-6.3

CS 486/686
Lecture 4: Jan 12, 2012
University of Waterloo

1

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Outline

- What are CSPs?
- Standard search and CSPs
- Improvements
 - Backtracking
 - Backtracking + heuristics
 - Forward checking

2




CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Introduction

- In the last couple of lectures we have been solving problems by searching in a space of states
 - Treating states as black boxes, ignoring any structure inside them
 - Using problem-specific routines
- Today we study problems where the state structure is important

3

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart





- **States:** all arrangements of 0, 1, ..., or 8 queens on the board
- **Initial state:** 0 queens on the board
- **Successor function:** Add a queen to the board
- **Goal test:** 8 queens on the board with no two of them attacking each other

$64 \times 63 \times \dots \times 57 \approx 3 \times 10^{14}$ states

4

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



- **States:** all arrangements k queens ($0 \leq k \leq 8$), one per column in the leftmost k columns, with no queen attacking another
- **Initial state:** 0 queens on the board
- **Successor function:** Add a queen to the leftmost empty column such that it is not attacked
- **Goal test:** 8 queens on the board

2057 States

5

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart


Introduction

- Earlier search methods studied often make choices in an arbitrary order
- In many problems the same state can be reached independent of the order in which the moves are chosen (commutative actions)
- Can we solve problems efficiently by being smart in the order in which we take actions?

6

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

4-queens Constraint Propagation

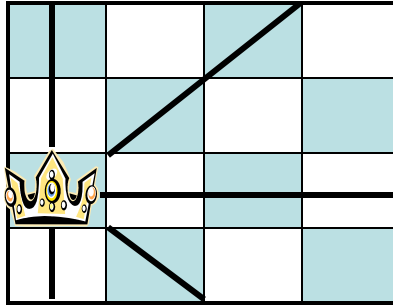


Place a queen in a square

Remove conflicting squares from
consideration

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

7

4-queens Constraint Propagation

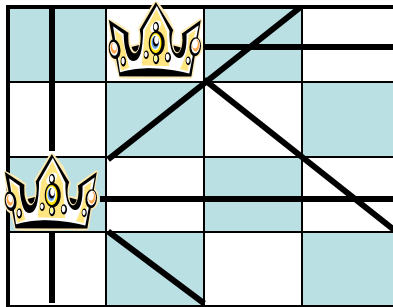


Place a queen in a square

Remove conflicting squares from
consideration

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

8

4-queens Constraint Propagation

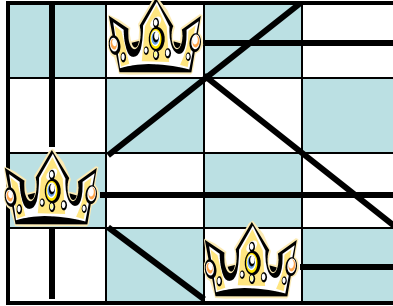


Place a queen in a square

Remove conflicting squares from consideration

9

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

4-queens Constraint Propagation

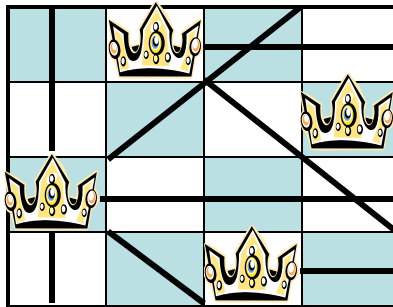

Place a queen in a square

Remove conflicting squares from consideration

10

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

CSP Definition

- A **constraint satisfaction problem** (CSP) is defined by $\{V, D, C\}$ where
 - $V = \{V_1, V_2, \dots, V_n\}$ is a set of variables
 - $D = \{D_1, \dots, D_n\}$ is the set of **domains**, D_i is the domain of possible values for variable V_i
 - $C = \{C_1, \dots, C_m\}$ is the set of **constraints**
 - Each constraint involves some subset of the variables and specifies the allowable combinations of values for that subset

11

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

CSP Definition

- A state is an **assignment** of values to some or all of the variables
 - $\{V_i = x_i, V_j = x_j, \dots\}$
- An assignment is **consistent** if it does not violate any constraints
- A **solution** is a complete, consistent assignment ("hard constraints")
 - Some CSPs also require an objective function to be optimized ("soft constraints")

12

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example 1: 8-Queens

- 64 variables V_{ij} , $i=1$ to 8, $j=1$ to 8
- Domain of each variable is $\{0,1\}$
- Constraints
 - $V_{ij}=1 \rightarrow V_{ik}=0$ for all $k \neq j$
 - $V_{ij}=1 \rightarrow V_{kj}=0$ for all $k \neq i$
 - Similar constraint for diagonals
 - $\sum_{i,j} V_{ij}=8$

Binary constraints
relate two variables

13

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example 2 - 8 queens


- 8 variables V_i , $i=1$ to 8
- Domain of each variable is $\{1,2,\dots,8\}$
- Constraints
 - $V_i=k \rightarrow V_j \neq k$ for all $j \neq i$
 - Similar constraints for diagonals

Binary constraints
relate two variables

14

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example 3 - Map Coloring

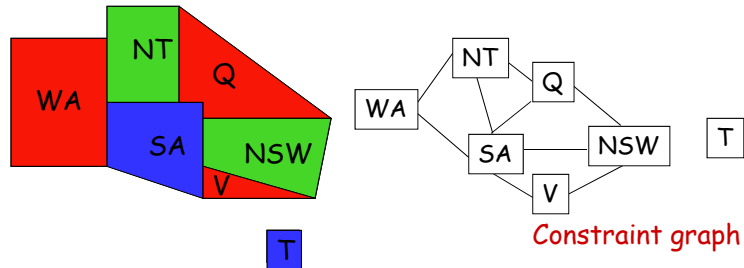

- 7 variables {WA, NT, SA, Q, NSW, V, T}
- Each variable has the same domain: {red, green, blue}
- No two adjacent variables have the same value:
 $WA \neq NT, WA \neq SA, NT \neq SA, NT \neq Q, SA \neq Q,$
 $SA \neq NSW, SA \neq V, Q \neq NSW, NSW \neq V$

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

15

Example from R and N, Annotations from Stanford CS121

Example 4 - Street Puzzle

1 2 3 4 5

$N_i = \{\text{English, Spaniard, Japanese, Italian, Norwegian}\}$
 $C_i = \{\text{Red, Green, White, Yellow, Blue}\}$
 $D_i = \{\text{Tea, Coffee, Milk, Fruit-juice, Water}\}$
 $J_i = \{\text{Painter, Sculptor, Diplomat, Violinist, Doctor}\}$
 $A_i = \{\text{Dog, Snails, Fox, Horse, Zebra}\}$

The Englishman lives in the Red house
 The Spaniard has a Dog
 The Japanese is a Painter
 The Italian drinks Tea
 The Norwegian lives in the first house on the left
 The owner of the Green house drinks Coffee
 The Green house is on the right of the White house
 The Sculptor breeds Snails
 The Diplomat lives in the Yellow house
 The owner of the middle house drinks Milk
 The Norwegian lives next door to the Blue house
 The Violinist drinks Fruit juice
 The Fox is in the house next to the Doctor's
 The Horse is next to the Diplomat's

Who owns the Zebra?
 Who drinks Water?

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

16

Example from R and N, Annotations from Stanford CS121

Street Puzzle

1 2 3 4 5

$N_i = \{\text{English, Spaniard, Japanese, Italian, Norwegian}\}$
 $C_i = \{\text{Red, Green, White, Yellow, Blue}\}$
 $D_i = \{\text{Tea, Coffee, Milk, Fruit-juice, Water}\}$
 $J_i = \{\text{Painter, Sculptor, Diplomat, Violinist, Doctor}\}$
 $A_i = \{\text{Dog, Snails, Fox, Horse, Zebra}\}$

The Englishman lives in the Red house $\rightarrow (N_i = \text{English}) \Leftrightarrow (C_i = \text{Red})$

The Spaniard has a Dog

The Japanese is a Painter $\rightarrow (N_i = \text{Japanese}) \Leftrightarrow (J_i = \text{Painter})$

The Italian drinks Tea

The Norwegian lives in the first house on the left $\rightarrow (N_1 = \text{Norwegian})$

The owner of the Green house drinks Coffee

The Green house is on the right of the White house

The Sculptor breeds Snails

The Diplomat lives in the Yellow house

The owner of the middle house drinks Milk

The Norwegian lives next door to the Blue house

The Violinist drinks Fruit juice

The Fox is in the house next to the Doctor's

The Horse is next to the Diplomat's

$(C_i = \text{White}) \Leftrightarrow (C_{i+1} = \text{Green})$
 $(C_5 \neq \text{White})$
 $(C_1 \neq \text{Green})$

left as an exercise, 17

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example from R and N, Annotations from Stanford CS121

Street Puzzle

1 2 3 4 5

$N_i = \{\text{English, Spaniard, Japanese, Italian, Norwegian}\}$
 $C_i = \{\text{Red, Green, White, Yellow, Blue}\}$
 $D_i = \{\text{Tea, Coffee, Milk, Fruit-juice, Water}\}$
 $J_i = \{\text{Painter, Sculptor, Diplomat, Violinist, Doctor}\}$
 $A_i = \{\text{Dog, Snails, Fox, Horse, Zebra}\}$

The Englishman lives in the Red house $\rightarrow (N_i = \text{English}) \Leftrightarrow (C_i = \text{Red})$

The Spaniard has a Dog

The Japanese is a Painter $\rightarrow (N_i = \text{Japanese}) \Leftrightarrow (J_i = \text{Painter})$

The Italian drinks Tea

The Norwegian lives in the first house on the left $\rightarrow (N_1 = \text{Norwegian})$

The owner of the Green house drinks Coffee

The Green house is on the right of the White house

The Sculptor breeds Snails

The Diplomat lives in the Yellow house

The owner of the middle house drinks Milk

The Norwegian lives next door to the Blue house

The Violinist drinks Fruit juice

The Fox is in the house next to the Doctor's

The Horse is next to the Diplomat's

$(C_i = \text{White}) \Leftrightarrow (C_{i+1} = \text{Green})$
 $(C_5 \neq \text{White})$
 $(C_1 \neq \text{Green})$

unary constraints

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example from R and N, Annotations from Stanford CS121

Street Puzzle

1 2 3 4 5

$N_i = \{\text{English, Spaniard, Japanese, Italian, Norwegian}\}$

$C_i = \{\text{Red, Green, White, Yellow, Blue}\}$

$D_i = \{\text{Tea, Coffee, Milk, Fruit-juice, Water}\}$

$J_i = \{\text{Painter, Sculptor, Diplomat, Violinist, Doctor}\}$

$A_i = \{\text{Dog, Snails, Fox, Horse, Zebra}\}$

$\forall i, j \in [1, 5], i \neq j, N_i \neq N_j$

$\forall i, j \in [1, 5], i \neq j, C_i \neq C_j$

...

The Englishman lives in the Red house

The Spaniard has a Dog

The Japanese is a Painter

The Italian drinks Tea

The Norwegian lives in the first house on the left

The owner of the Green house drinks Coffee

The Green house is on the right of the White house

The Sculptor breeds Snails

The Diplomat lives in the Yellow house

The owner of the middle house drinks Milk

The Norwegian lives next door to the Blue house

The Violinist drinks Fruit juice

The Fox is in the house next to the Doctor's

The Horse is next to the Diplomat's

19

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example from R and N, Annotations from Stanford CS121

Street Puzzle

1 2 3 4 5

$N_i = \{\text{English, Spaniard, Japanese, Italian, Norwegian}\}$

$C_i = \{\text{Red, Green, White, Yellow, Blue}\}$

$D_i = \{\text{Tea, Coffee, Milk, Fruit-juice, Water}\}$

$J_i = \{\text{Painter, Sculptor, Diplomat, Violinist, Doctor}\}$

$A_i = \{\text{Dog, Snails, Fox, Horse, Zebra}\}$

The Englishman lives in the Red house

The Spaniard has a Dog

The Japanese is a Painter

The Italian drinks Tea

The Norwegian lives in the first house on the left $\rightarrow N_1 = \text{Norwegian}$

The owner of the Green house drinks Coffee

The Green house is on the right of the White house

The Sculptor breeds Snails

The Diplomat lives in the Yellow house

The owner of the middle house drinks Milk $\rightarrow D_3 = \text{Milk}$

The Norwegian lives next door to the Blue house

The Violinist drinks Fruit juice

The Fox is in the house next to the Doctor's

The Horse is next to the Diplomat's

20

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example from R and N, Annotations from Stanford CS121

Street Puzzle

1 2 3 4 5

$N_i = \{\text{English, Spaniard, Japanese, Italian, Norwegian}\}$
 $C_i = \{\text{Red, Green, White, Yellow, Blue}\}$
 $D_i = \{\text{Tea, Coffee, Milk, Fruit-juice, Water}\}$
 $J_i = \{\text{Painter, Sculptor, Diplomat, Violinist, Doctor}\}$
 $A_i = \{\text{Dog, Snails, Fox, Horse, Zebra}\}$

The Englishman lives in the Red house $\rightarrow C_1 \neq \text{Red}$
The Spaniard has a Dog $\rightarrow A_1 \neq \text{Dog}$
The Japanese is a Painter
The Italian drinks Tea
The Norwegian lives in the first house on the left $\rightarrow N_1 = \text{Norwegian}$
The owner of the Green house drinks Coffee
The Green house is on the right of the White house
The Sculptor breeds Snails
The Diplomat lives in the Yellow house
The owner of the middle house drinks Milk $\rightarrow D_3 = \text{Milk}$
The Norwegian lives next door to the Blue house
The Violinist drinks Fruit juice $\rightarrow J_3 \neq \text{Violinist}$
The Fox is in the house next to the Doctor's
The Horse is next to the Diplomat's

21

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example 5 - Scheduling

Four tasks T_1 , T_2 , T_3 , and T_4 are related by time constraints:

- T_1 must be done during T_3
 - T_2 must be achieved before T_1 starts
 - T_2 must overlap with T_3
 - T_4 must start after T_1 is complete
- Are the constraints compatible?
 - What are the possible time relations between two tasks?
 - What if the tasks use resources in limited supply?

22

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example 6 - 3-Sat

- n Boolean variables, V_1, \dots, V_n
- K constraints of the form $V_i \sqsubseteq V_j \vee V_k$
where V_i is either true or false
- NP-complete

23

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Properties of CSPs

- Types of variables
 - Discrete and finite
 - Map colouring, 8-queens, boolean CSPs
 - Discrete variables with infinite domains
 - Scheduling jobs in a calendar
 - Require a **constraint language** ($\text{Job}_1+3 \leq \text{Job}_2$)
 - Continuous domains
 - Scheduling on the Hubble telescope
 - **Linear programming**

24

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Properties of CSPs

- Types of constraints
 - **Unary** constraint relates a variable to a single value
 - Queensland=Blue, SA≠Green
 - **Binary** constraints relates two variables
 - SA≠NSW
 - Can use a constraint graph to represent CSPs with only binary constraints
 - Higher order constraints involve three or more variables
 - Alldiff(V_1, \dots, V_n)
 - Can use a constraint hypergraph to represent the problem

25

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

CSPs and search

- N variables V_1, \dots, V_n
- Valid assignment: $\{V_1=x_1, \dots, V_k=x_k\}$ for $0 \leq k \leq n$ such that values satisfy constraints on the variables
- States: valid assignments
- Initial state: empty assignment
- Successor:
 - $\{V_1=x_1, \dots, V_k=x_k\} \rightarrow \{V_1=x_1, \dots, V_k=x_k, V_{k+1}=x_{k+1}\}$
- Goal test: complete assignment
- If all domains have size d , then there are $O(d^n)$ complete assignments

26

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

CSPs and commutativity

- CSPs are commutative!
 - The order of application of any given set of actions has no effect on the outcome
 - When assigning values to variables we reach the same partial assignment, no matter the order
 - All CSP search algorithms generate successors by considering possible assignments for only a **single variable at each node in the search tree**

27

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

CSPs and commutativity

- 3 variables V_1, V_2, V_3
- Let the current assignment be
 - $A = \{V_1 = x_1\}$
- Pick variable 3
- Let domain of V_3 be $\{a, b, c\}$
- The successors of A are
 - $\{V_1 = x_1, V_3 = a\}$
 - $\{V_1 = x_1, V_3 = b\}$
 - $\{V_1 = x_1, V_3 = c\}$

28

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Backtracking Search

```
function BACKTRACKING-SEARCH(csp) returns a solution, or failure
  return RECURSIVE-BACKTRACKING({}, csp)

function RECURSIVE-BACKTRACKING(assignment, csp) returns a solution, or
failure
  if assignment is complete then return assignment
  var ← SELECT-UNASSIGNED-VARIABLE(Variables[csp], assignment, csp)
  for each value in ORDER-DOMAIN-VALUES(var, assignment, csp) do
    if value is consistent with assignment according to Constraints[csp] then
      add { var = value } to assignment
      result ← RECURSIVE-BACKTRACKING(assignment, csp)
      if result ≠ failure then return result
      remove { var = value } from assignment
  return failure
```


Depth first search which chooses values for one variable at a time
Backtracks when a variable has no legal values to assign

29

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Backtracking



0



30

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



Backtracking



CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

31


Backtracking

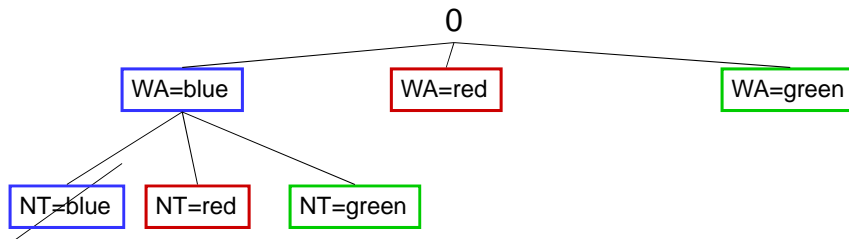

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

32

Backtracking

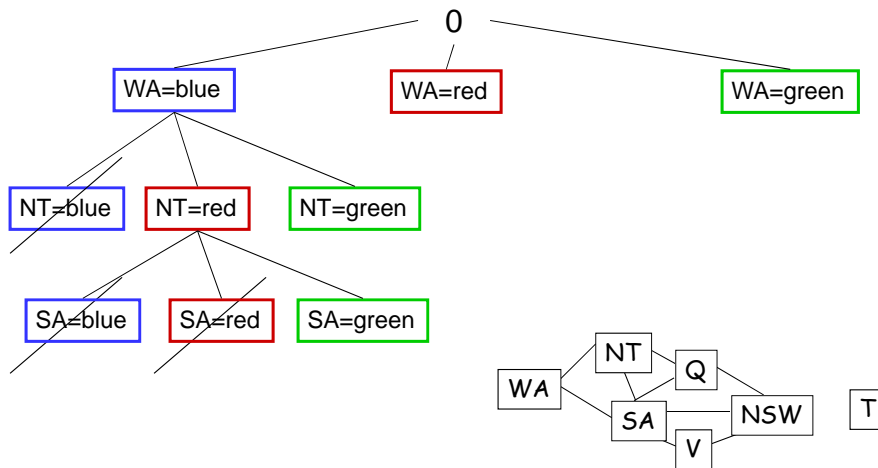

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

33

Backtracking and efficiency

- Backtracking search is an uninformed search method
 - Not very efficient
- We can do better by thinking about the following questions
 - Which variable should be assigned next?
 - In which order should its values be tried?
 - Can we detect inevitable failure early (and avoid the same failure in other paths)?

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

34

Most constrained variable

- Choose the variable which has the fewest "legal" moves
 - AKA minimum remaining values (MRV) heuristic



$D_{NT} = \{\text{green, blue}\}$

$D_{SA} = \{\text{green, blue}\}$

$D_{\text{others}} = \{\text{red, green, blue}\}$

$D_{SA} = \{\text{blue}\}$

$D_Q = \{\text{blue, red}\}$

$D_{\text{others}} = \{\text{red, green, blue}\}$

35

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Most constraining variable

- Most constraining variable:
 - choose the variable with the most constraints on remaining variables
- Tie-breaker among most constrained variables




SA is involved in 5 constraints

36

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Least-constraining value

- Given a variable, choose the least constraining value:
 - the one that rules out the fewest values in the remaining variables

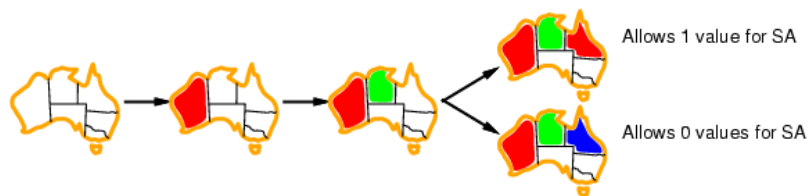

37

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart


Forward checking

- The third question was
 - Is there a way to detect failure early?
- Forward checking
 - Keep track of remaining legal values for unassigned variables
 - Terminate search when any variable has no legal values

38

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Forward Checking in Map Coloring

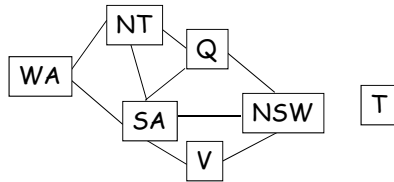


WA	NT	Q	NSW	V	SA	T
RGB	RGB	RGB	RGB	RGB	RGB	RGB

39

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Forward Checking in Map Coloring

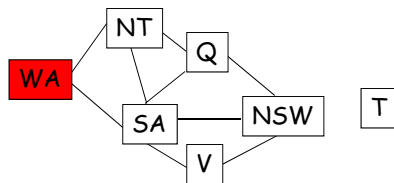


WA	NT	Q	NSW	V	SA	T
RGB	RGB	RGB	RGB	RGB	RGB	RGB
R	RGB	RGB	RGB	RGB	RGB	RGB

Forward checking removes the value Red of NT and of SA

40

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Forward Checking in Map Coloring

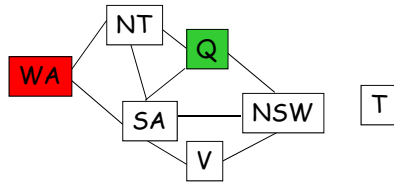


WA	NT	Q	NSW	V	SA	T
RGB	RGB	RGB	RGB	RGB	RGB	RGB
R	GB	RGB	RGB	RGB	GB	RGB
R	B	G	R B	RGB	B	RGB

41

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Forward Checking in Map Coloring

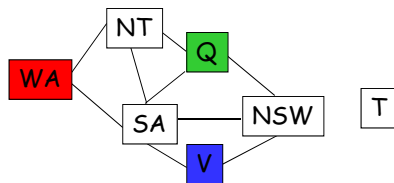

WA	NT	Q	NSW	V	SA	T
RGB	RGB	RGB	RGB	RGB	RGB	RGB
R	GB	RGB	RGB	RGB	GB	RGB
R	B	G	RB	RGB	B	RGB
R	B	G	R B	B	B	RGB

42

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Forward Checking in Map Coloring

Empty set: the current assignment
 $\{(WA \leftarrow R), (Q \leftarrow G), (V \leftarrow B)\}$
 does not lead to a solution


WA	NT	Q	NSW	V	SA	T
RGB	RGB	RGB	RGB	RGB	RGB	RGB
R	GB	RGB	RGB	RGB	GB	RGB
R	B	G	RB	RGB	B	RGB
R	B	G	RB	B	B	RGB

43

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example: 4 Queens



	1	2	3	4
1				
2				
3				
4				

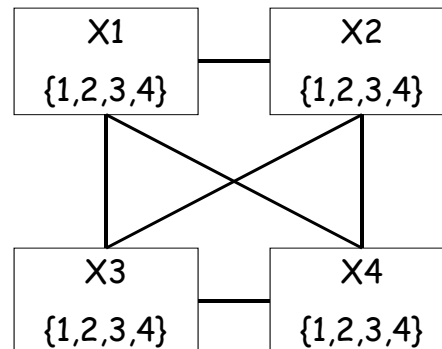

44



CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example: 4 Queens

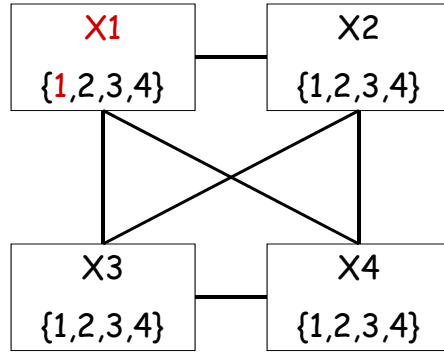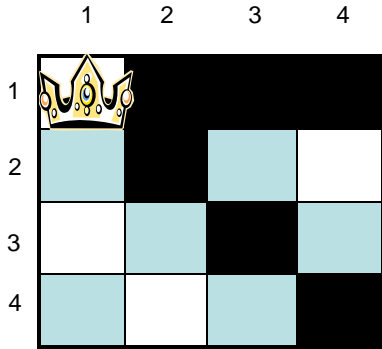



45

Example: 4 Queens

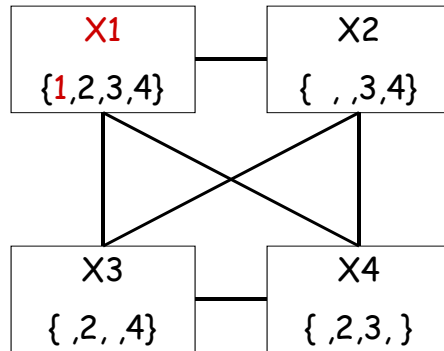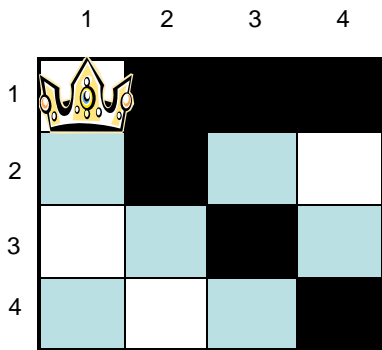



46

Example: 4 Queens

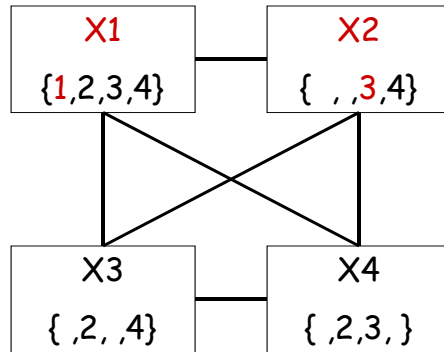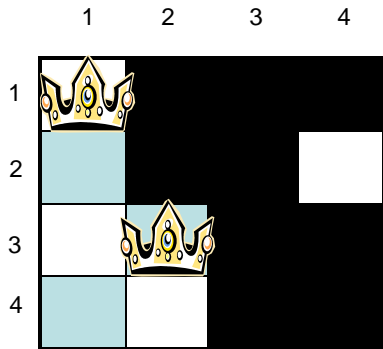



47

Example: 4 Queens

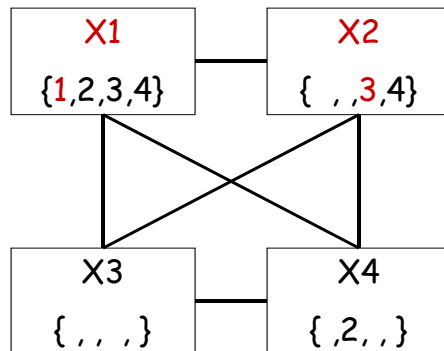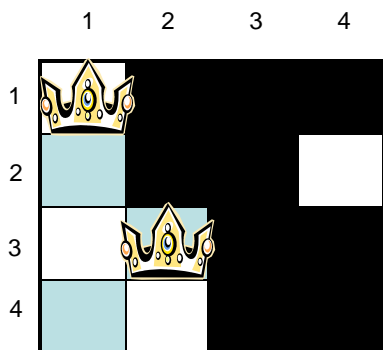

48



Example: 4 Queens

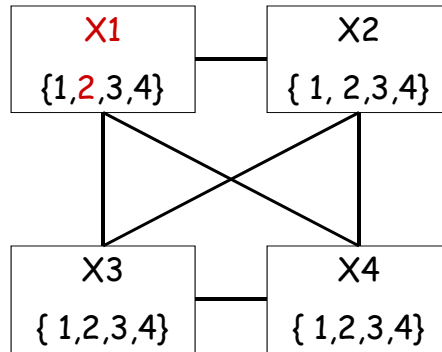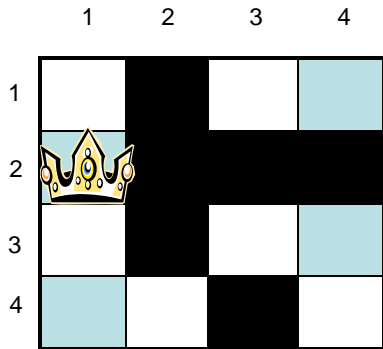

49

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



Example: 4 Queens

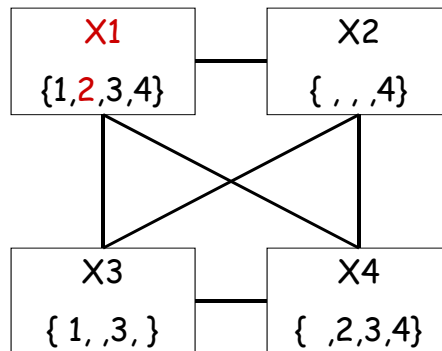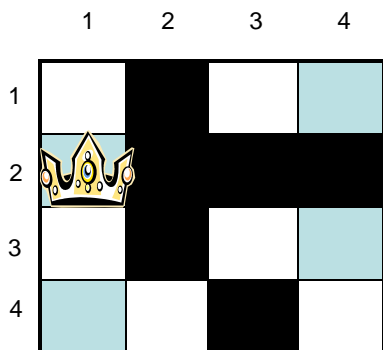

50

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



Example: 4 Queens

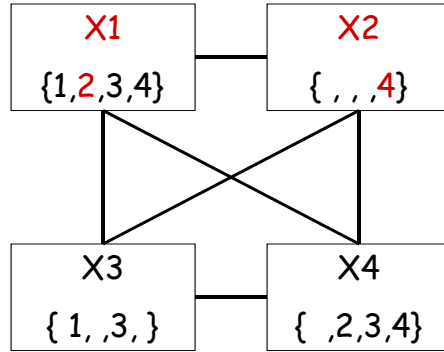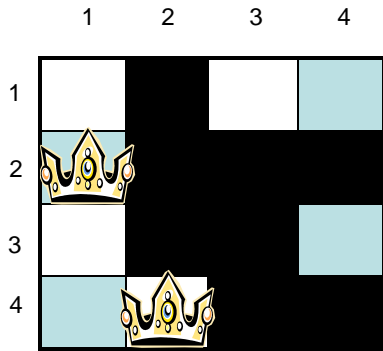

51

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



Example: 4 Queens

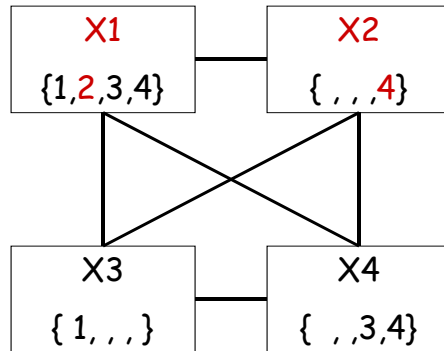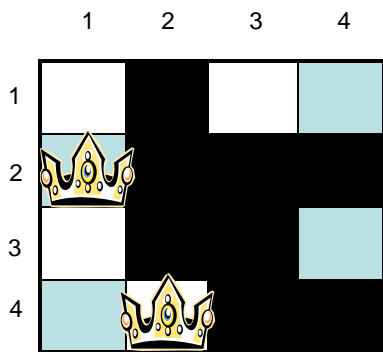

52

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



Example: 4 Queens

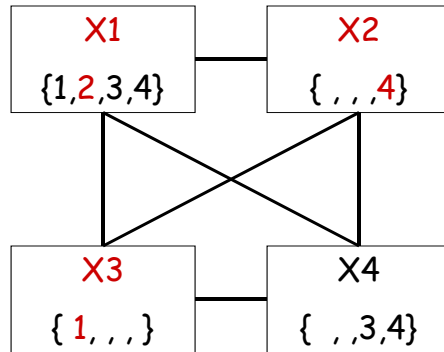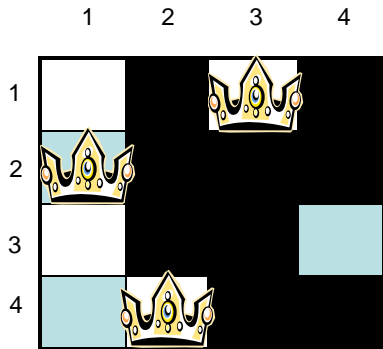

53

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart



Example: 4 Queens

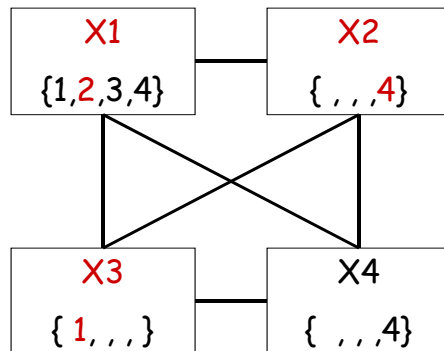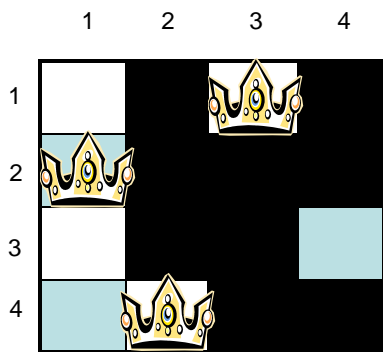

54

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Example: 4 Queens

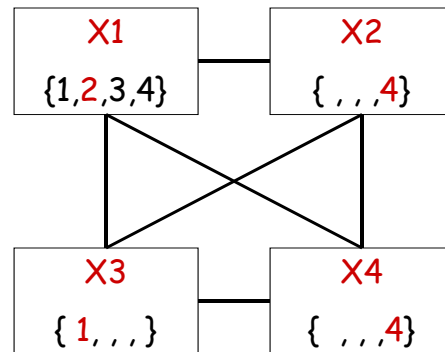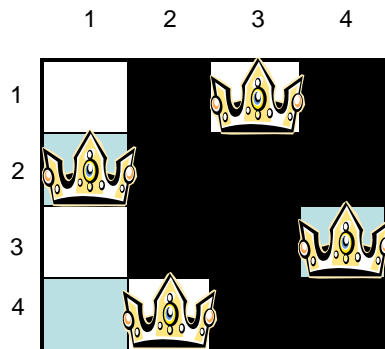

55

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Summary

- What you should know
 - How to formalize problems as CSPs
 - Backtracking search
 - Heuristics
 - Variable ordering
 - Value ordering
 - Forward checking

56

CS486/686 Lecture Slides (c) 2012 K. Larson and P. Poupart

Next class

- Local search techniques